


# Bronze Gate Valve

## Class 300 • Union Bonnet • Non-Rising Stem • Flanged Ends

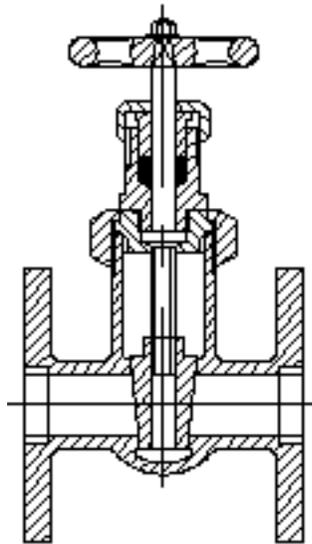

### Product no. 113200 - 300s

#### Size Range:

1 through 4 inches

Max. temperature limit is 450°F (232°C)

#### Working Pressures

##### Non-Shock:

300 psi Steam, Basic Rating


500 psi Cold Working Pressure

### Features

- Non Rising Stem
- Union Bonnet
- Flanged Ends are plain faces with two V-shaped concentric grooves between the port and bolt holes.
- Full Ports
- Back Seat
- **Stainless Steel Seat Rings**
- Recommended for WOG
- MSS Specification SP-80

For more details please contact:  
export@oswalvalve.com

Above size 3" manufacturers standard applicable.

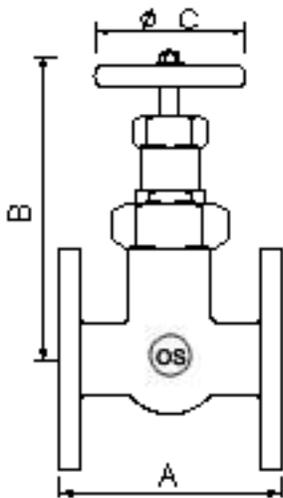

### Principal Parts & Materials

Part	Material	ASTM
Body & Bonnet	Bronze	B62 alloy 83600
Disc	Bronze	B62 alloy 83600
Seat Ring	Stainless Steel	A276 S41000
Stem	Brass	B16 alloy C36000

### Dimensions and Weights

Millimeters - Kilograms

DN	1" 25	1 1/4" 32	1 1/2" 40	2" 50	2 1/2" 65	3" 80	4" 100
A	100	110	120	135	-	-	-
B	130	150	170	200	-	-	-
C	70	85	95	105	-	-	-
WTS.	3.00	3.40	5.40	6.50	-	-	-